

WMP32-2



Motor Pumps Powermate WMP series is the right answer to handle clean water in all sites. WMP series is the perfect solution for transferring water as well as supporting the management of water treatment. Pumps feature limited self-priming. Pump body filling with liquid is not mandatory requirement, although it will help to speed up the working time. Sturdy roll frame for added protection and easy maintenance.


FEATURES

- Powermate OHV engine, 4-Cycle
- Fuel: Petrol
- Starting Systems: Recoil
- Low-oil level shutdown automatically safeguards engine from damage
- Practical quick user's Starting Instruction (decal)
- Pump type: Clean watering pumps
- Cast Iron Volute and Impeller for durability



Main Technical Data

Type	Clean watering pumps	
Max suction head	m	7
Max Delivery Head	m	30
Delivery Volume	l/min	530
Inlet pipe diameter	inches	2
Outlet pipe diameter	inches	2

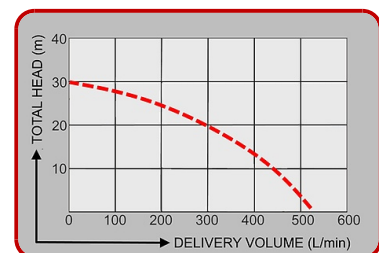

Engine

Brand		Powermate
Type		OHV
Operating Speed Nominal	rpm	3600
Fuel		Petrol
Starting Systems		Recoil
Oil capacity	l	0.6
Low Oil Shutdown		√




Autonomy

Fuel tank capacity	l	3.6
Fuel consumption @ 75%	l/h	1.8
Running time @ 75%	h	2.0



Dimensional data

Length	(L) mm	465
Width	(W) mm	435
Height	(H) mm	420
Dry weight	Kg	24
Carton box dimension LxWxH	mm	465x450x460

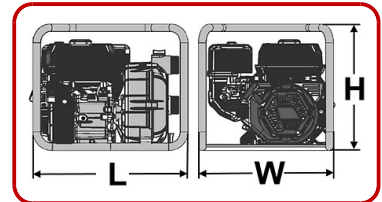

Noise emission

Guaranteed noise level (LWA)	dB(A)	108
Noise level at 7 m	dB(A)	78

General equipment

Strainer	n°	1
Coupling Set	n°	2
Hose band	n°	3
Spark plug tool		√
Oil guard		√



The information is aligned with the Data file at the time of download. Printed on 17/09/2019 (ID 6447)

©2019 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

Powermate
by PRAMAC